




Technical data sheet

Starter battery

Battery type	12V 115Ah +D Tipo C13	Product code	EPHA1100
Specification		Cell properties	
Nominal voltage	12 V	Grid prod. technology	Gravity casted
Capacity (C20)	115 Ah at 25°C to 10,5V	+ grid alloy	PbCa
Cold cranking current (EN 18°C)	720 A	+ strip / grid thickness	1.7 mm
Cold cranking current (DIN 18°C)	420 A	(-) grid	Dk1.3
Weight	24.5 kg ± 5%	Grid prod. technology	Gravity casted
Technology	Flooded/SLI	- grid alloy	PbCa
		- strip / grid thickness	1.3 mm
		Separator	
		Type	PE
		Thickness	1.4 mm
Overall dimensions		Drawings	
Length	344 +0/-4 mm	Base hold-down	Layout
Width	171 +0/-2 mm		
Height	232 +0/-3 mm		
Base hold-down	B00		
Layout	0		
Terminal type	1		
Container material	PP		
Box color	Black		
Lid color	Black		
Plug			
Electrolyte			
Electrolyte type	H ₂ SO ₄		
Electrolyte spec density at 25°C	1.28 ± 0.01 g/cm ³		

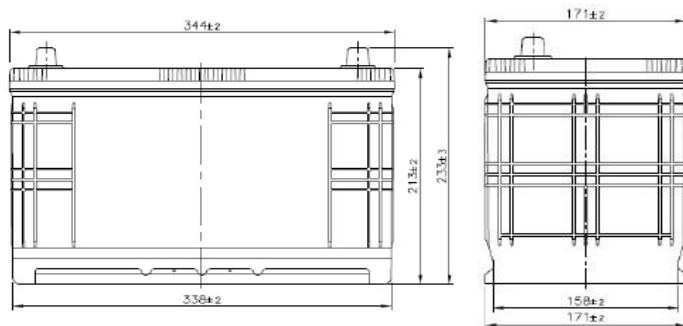

Terminal type	Key characteristics
	<ul style="list-style-type: none"> - Low water consumption - Meets EN requirement (EN 2) and vibration resistance (V1)

